

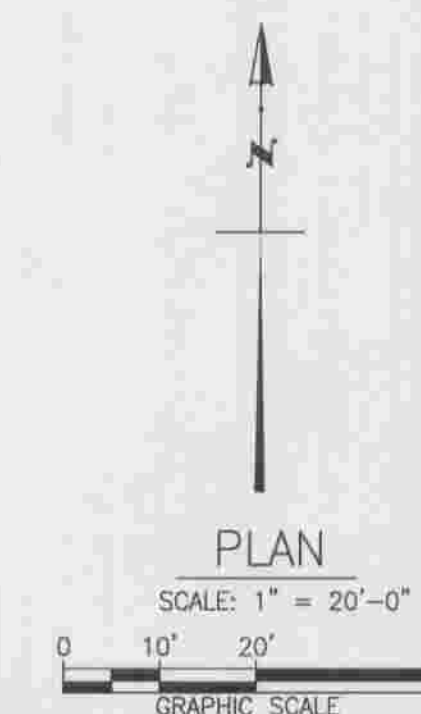


SCALE
HORIZONTAL SCALE: 1"=20'
VERTICAL SCALE: 1"=4'

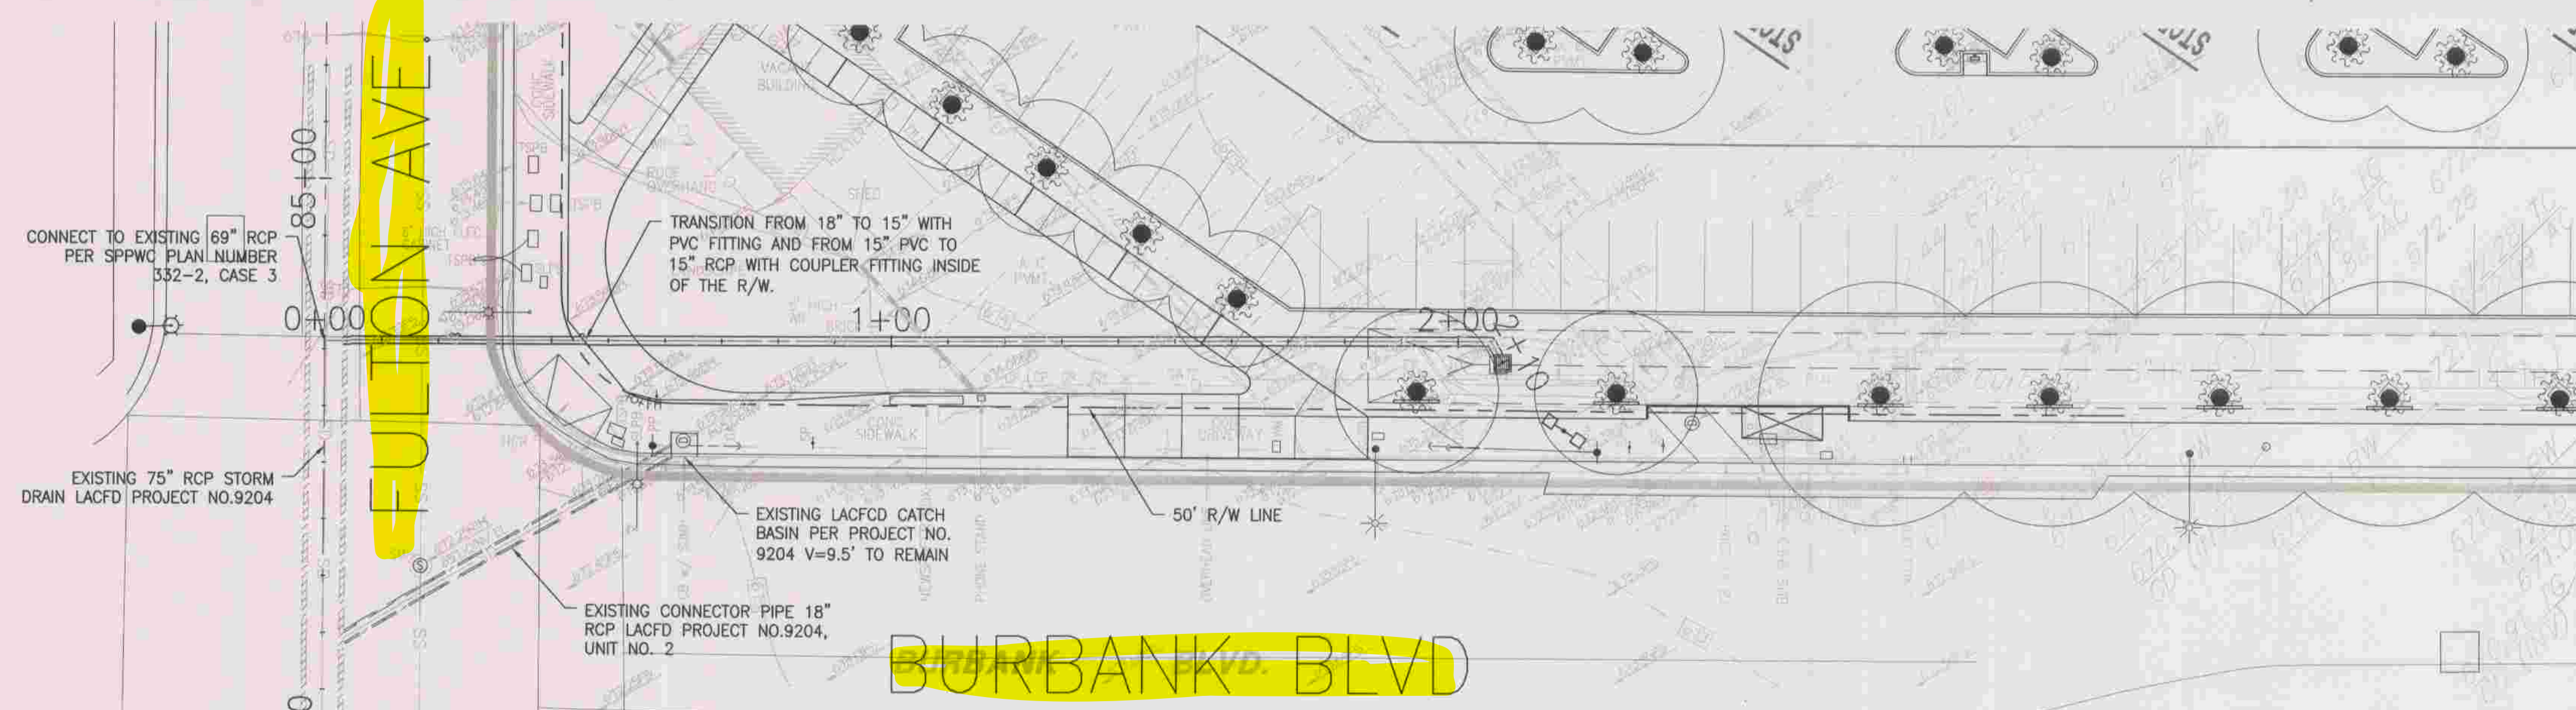

APPROVED DIRECTOR OF PUBLIC WORKS	NO.	REVISIONS	REVISED BY	APPROVED BY	DATE
BY _____ DEPUTY DIRECTOR					
RECOMMENDED					
BY _____ ASSISTANT DIVISION ENGINEER					
SUBMITTED					
BY _____					
DATE					

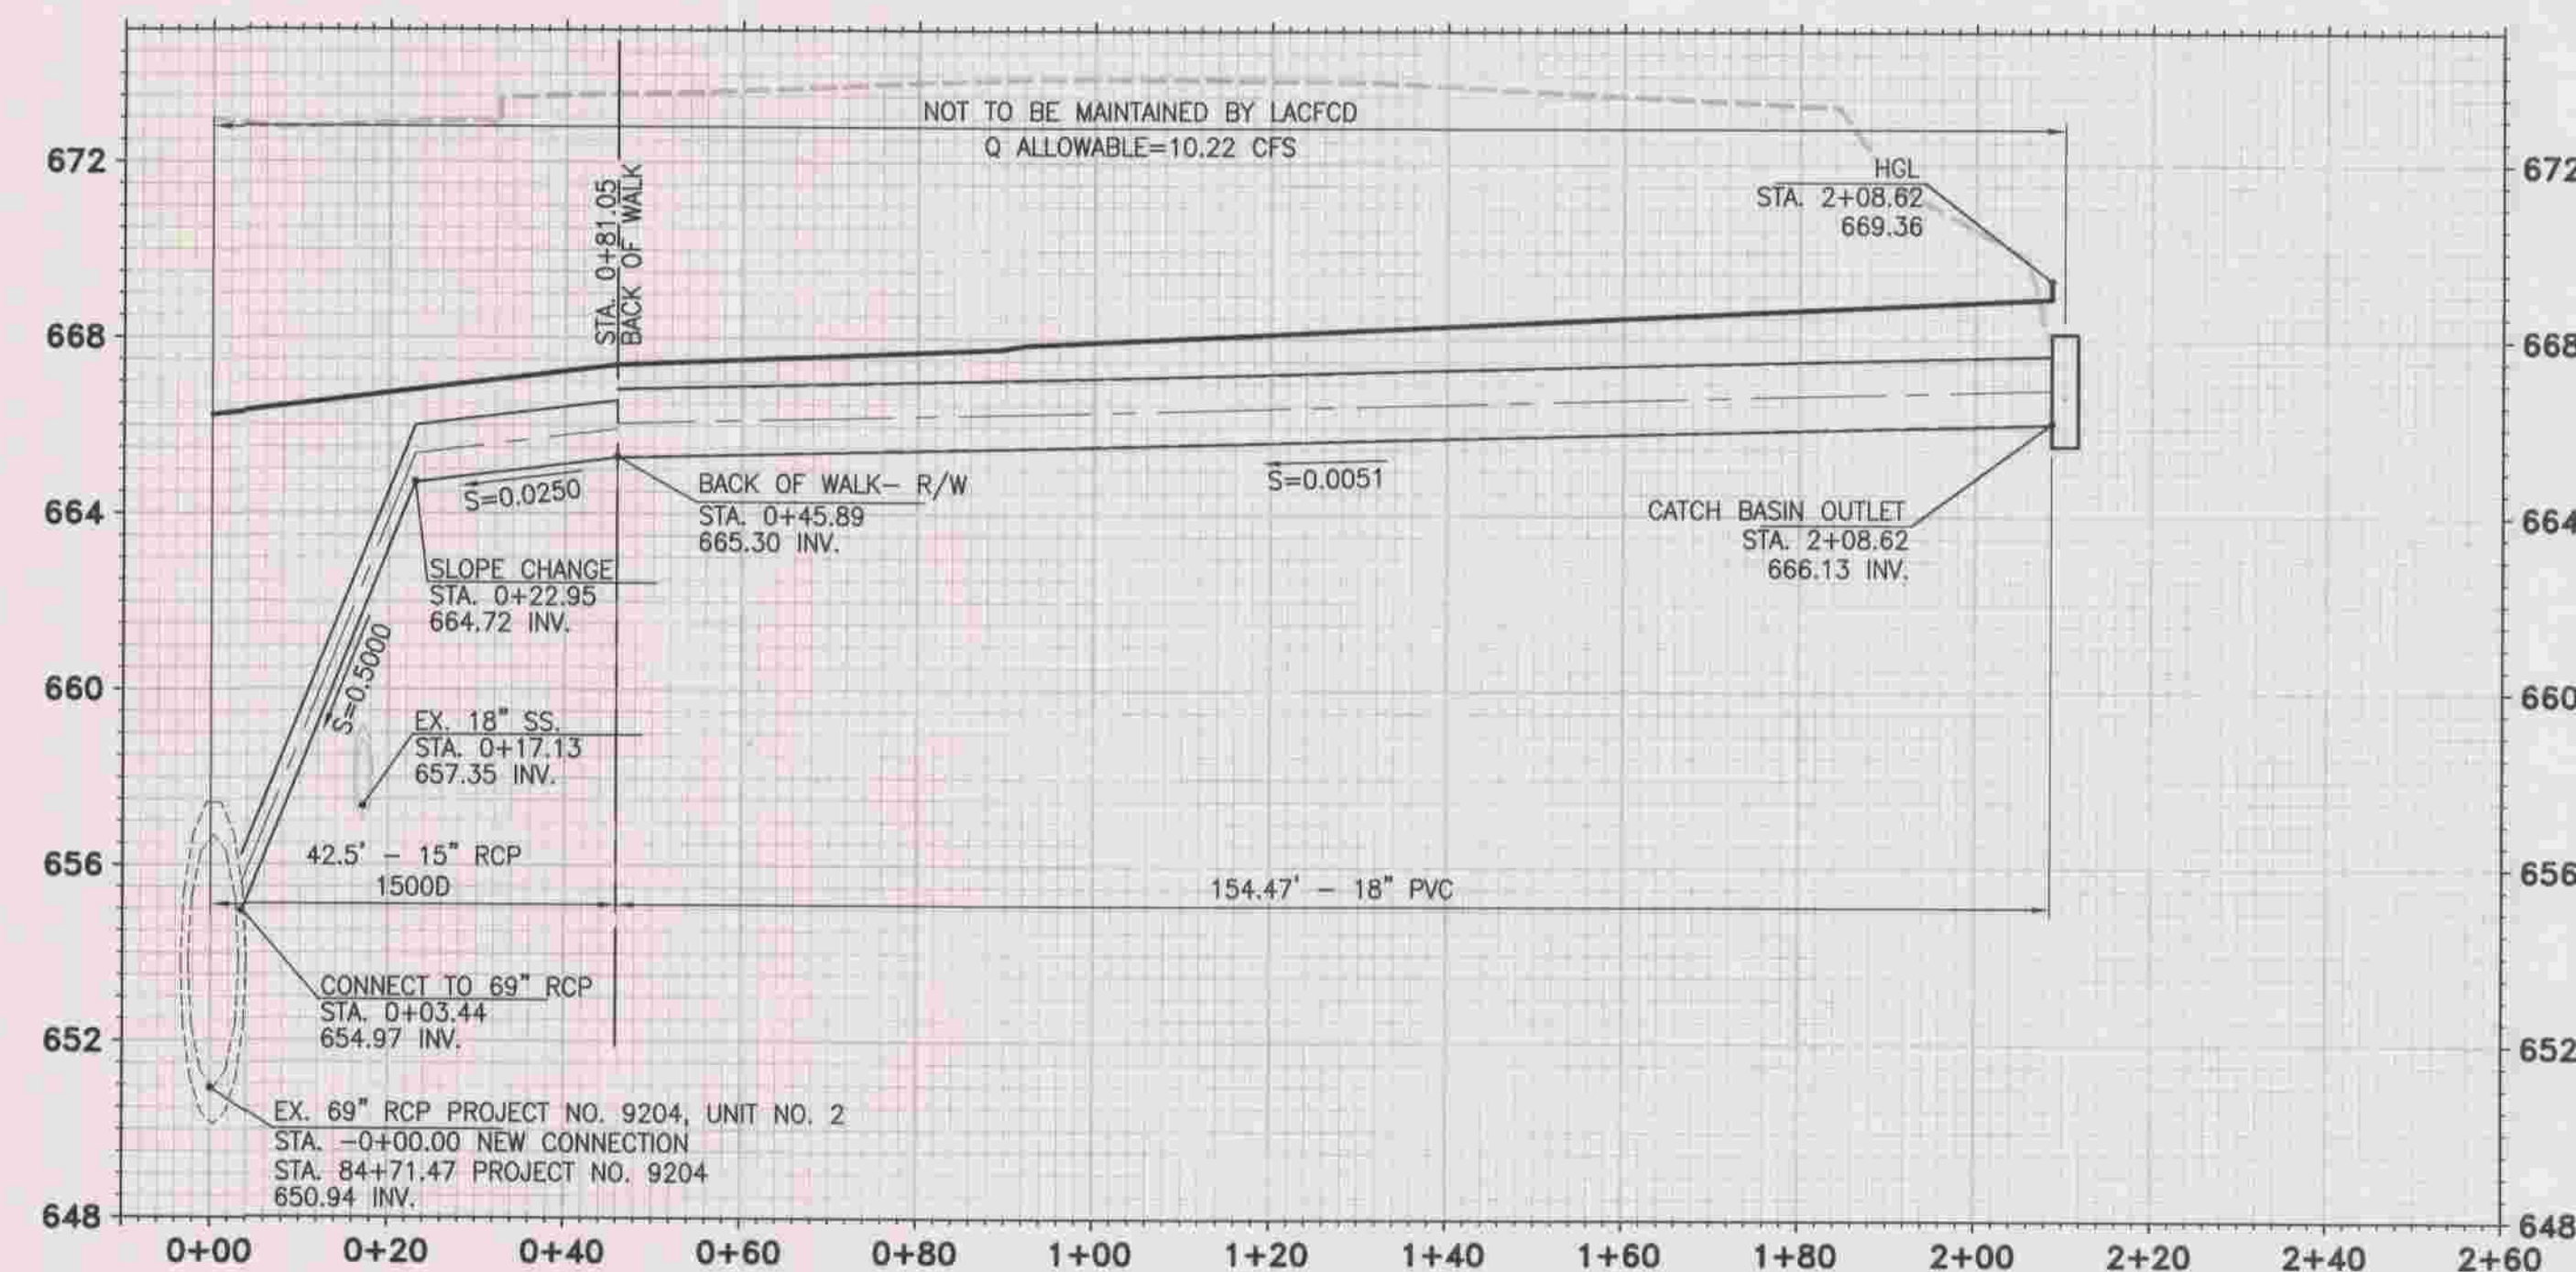

PROPOSED STORM DRAIN PROFILE

COUNTY OF LOS ANGELES DEPARTMENT OF PUBLIC WORKS

MTA BUS STATION EXTENSION
5800 FULTON AVE
VALLEY GLEN, CA 91401

LACCD VALLEY COLLEGE
5800 FULTON AVE
VALLEY GLEN, CA 91401

kpt Consulting Engineers
6080 Center Dr., Suite 750
Los Angeles, California 90045
(310) 665-2800 Fax: (310) 665-9075

SHEET 2 OF 2

16-10-d.dgn 5/03

COUNTY OF LOS ANGELES
PROPOSED STORM DRAIN
CONNECTION TO EXISTING LA COUNTY CATCH BASIN

GENERAL NOTES

- EXISTING UTILITIES SHALL BE MAINTAINED IN PLACE BY THE CONTRACTOR, UNLESS OTHERWISE NOTED, AND ALL UTILITIES CROSSING THE TRENCH SHALL BE TEMPORARILY SUPPORTED TO THE SATISFACTION OF THE OWNER.
- THE WORK SHOWN ON THESE DRAWINGS REQUIRES THE PRIME CONTRACTOR TO HAVE A VALID CLASS A OR C42 LICENSE ISSUED BY THE STATE OF CALIFORNIA.
- ALL FIELD BOOK REFERENCES ARE TO LOS ANGELES COUNTY DEPARTMENT OF PUBLIC WORKS FIELD BOOKS, UNLESS OTHERWISE NOTED.

CONCRETE REMOVAL NOTES

WHERE REINFORCEMENT IS REQUIRED TO EXTEND THROUGH THE NEW JOINT, CONCRETE SHALL BE REMOVED IN THE FOLLOWING SEQUENCE.

- A SAWCUT SHALL BE MADE ONE AND ONE-HALF INCHES DEEP AT THE REMOVAL LIMITS. CARE SHALL BE EXERCISED IN SAWING AT THE REMOVAL LIMITS SO AS NOT TO CUT THE REINFORCING STEEL IN THE REMAINING SLAB. THE EXISTING REINFORCING STEEL SHALL BE RETAINED AND EXTENDED INTO THE NEW CONSTRUCTION AS INDICATED ON THE PLANS.
- USING HANDHELD EQUIPMENT, THE CONCRETE SHALL BE CAREFULLY REMOVED FOR THE FULL DEPTH OF THE WALL OR SLAB AND FOR A MINIMUM DISTANCE FORM THE SAWCUT EQUAL TO THE LONGEST EXTENSION OF THE EXISTING BARS TO BE EXTENDED INTO THE NEW CONSTRUCTION. THIS EXTENSION SHALL BE 30 BAR DIAMETERS, UNLESS OTHERWISE SHOWN.
- EXISTING REINFORCEMENT SHALL BE CUT TO THE REQUIRED BAR EXTENSION.
- THE REMAINING CONCRETE MAY BE REMOVED BY ANY SUITABLE METHOD UPON APPROVAL OF THE ENGINEER, WHO SHALL BE THE SOLE JUDGE OF THE USE OF ANY CONCRETE REMOVAL EQUIPMENT, EXPLOSIVES, WRECKING BALL, OR OTHER SIMILAR DEVICES, WHICH ARE LIKELY TO DAMAGE THE CONCRETE TO BE LEFT IN PLACE, SHALL NOT BE USED.

PRIVATE ENGINEERS NOTICE TO CONTRACTORS

THE EXISTENCE AND LOCATION OF ANY UNDERGROUND UTILITY PIPES OR STRUCTURES SHOWN ON THESE PLANS ARE OBTAINED BY A SEARCH OF THE AVAILABLE RECORDS. TO THE BEST OF OUR KNOWLEDGE, THERE ARE NO EXISTING UTILITIES EXCEPT AS SHOWN ON THIS MAP. THE CONTRACTOR IS REQUIRED TO TAKE DUE PRECAUTIONARY MEASURES TO PROTECT THE UTILITY LINES SHOWN AND ANY OTHER LINES NOT OF RECORD OR SHOWN ON THIS DRAWING.

[Signature]

RCE SIGNATURE

10-26-11
DATE

1-800-227-2600
CALL USA/SC FOR
UNDERGROUND LOCATING
48 HOURS BEFORE YOU
DIG!

IMPORTANT NOTICE
SECTION 4216/4217 OF GOVERNMENT
CODE REQUIRES A DIGALERT IDENTIFICATION
NUMBER BE ISSUED BEFORE A "PERMIT TO
EXCAVATE" WILL BE VALID. FOR YOUR
DIGALERT I.D. NUMBER CALL UNDERGROUND
SERVICE ALERT TOLL FREE
1-800-227-2600 TWO WORKING DAYS
BEFORE YOU DIG.



VICINITY MAP
N.T.S.
THOMAS GUIDE 562-D1

INDEX TO PROJECT DRAWINGS

SHEET NO.	DESCRIPTION
1	TITLE SHEET
2	PROPOSED STORM DRAIN PROFILE

INDEX TO STANDARD PLANS

AMERICAN PUBLIC WORKS ASSOCIATION
STANDARD SPECIFICATIONS FOR PUBLIC WORKS CONSTRUCTION, LATEST EDITION

STD. PLAN	TITLE
224-1	SUPPORTS FOR CONDUIT ACROSS TRENCHES
332-2	JUNCTION STRUCTURE — PIPE TO PIPE (ID LESS THAN OR EQUAL TO 24")

REFERENCES

LACFCD 470-9204 D4.12

BENCH MARK:

BENCH MARK NO. 09415
ELEVATION: 686.068 FT.
DESCRIBED AS FOLLOWS:
WIRE SPK IN W CURB FULTON AVE; 3 FT N OF
BC RET N OF FIRST ALLEY S OF OXNARD STREET



TITLE SHEET

COUNTY OF LOS ANGELES DEPARTMENT OF PUBLIC WORKS

MTA BUS STATION EXTENSION
5800 FULTON AVE
VALLEY GLEN, CA 91401

LACCD VALLEY COLLEGE
5800 FULTON AVE
VALLEY GLEN, CA 91401

kpf Consulting Engineers
6060 Center Dr. Suite 750
Los Angeles, California 90045
(310) 665-2800 Fax (310) 665-9075



APPROVED DIRECTOR OF PUBLIC WORKS	NO.	REVISIONS	REVISED BY	APPROVED BY	DATE
BY _____ DEPUTY DIRECTOR DATE _____					
RECOMMENDED					
BY _____ ASSISTANT DIVISION ENGINEER DATE _____					
SUBMITTED					
BY _____ DATE _____					

SHEET 1 OF 2