

(E)
(E)
(E)
(E)
(E)

NOTES :

- 2 JOIN CONDUIT AND EXTEND TO THE NEW PULL BOX.

- 3 THESE LOOPS CONNECTED TO CONTROLLER AT BUFFALO AVE/BUSWAY.
- 4 THESE LOOPS CONNECTED TO CONTROLLER AT WOODMAN AVE/BUSWAY


- 5 REMOVE EXISTING 170 CONTROLLER AND INSTALL NEW 2070 CONTROLLER IN EXISTING 332 CABINET.

6. INSTALL STRIPING, SIGNS AND PAVEMENT MARKINGS PER LADOT DWG. No. A-3935 FOR THIS PROJECT. REMOVE ALL CONFLICTING STRIPING AND PAVEMENT MARKINGS.

7. SEE STREET LIGHTING SHEET FOR WORK ON STREET LIGHTING FACILITIES

8. INSTALL TRANSIT PRIORITY LOOPS PER LADOT STD. DWG. No. S-70.1F AND VEHICLE LOOPS PER STD. DWG No. S-70.1A.

9. ALL NEW VEHICLE AND PEDESTRIAN TRAFFIC SIGNALS SHALL BE LED MODULES, PER LADOT SPECIFICATION 92-088-03 (LATEST EDITION).



SCALE: 1 = 20'
NORTH/SOUTH: Woodman Ave.

[illegible]


NOTICE TO CONTRACTOR

1. THE CONTRACTOR WHERE OTHERWISE INDICATED, MATERIALS AND INSTALLATION METHODS SHALL CONFORM TO THE LATEST EDITION, WITH SUPPLEMENTS, OF THE STANDARD SPECIFICATION FOR PUBLIC WORKS CONSTRUCTION, ADOPTED BY THE CITY OF LOS ANGELES BOARD OF PUBLIC WORKS (LAPBW), INCLUDING THE LATEST VERSION OF STANDARD PLANS 610 ISSUED BY THE LAPBW, AND THE LATEST EDITION, WITH AMENDMENTS, OF THE SPECIAL PROVISIONS, STANDARD DRAWINGS AND THE INSTALLATION AND MODIFICATION OF TRAFFIC SIGNALS, ISSUED BY THE CITY OF LOS ANGELES DEPARTMENT OF TRANSPORTATION (LADOT).
2. THE LADOT TRAFFIC SIGNAL INSPECTOR SHALL BE NOTIFIED AT (213) 792-7637 THE SENIOR MAINTENANCE SUPERVISOR AT (818) 756-7845, AND THE LADOT METRO RAIL ENGINEER AT (213) 485-2610 THREE (3) WORKING DAYS PRIOR TO THE BEGINNING OF CONSTRUCTION.
3. NORMAL TRAFFIC CONTROL SHALL BE MAINTAINED FROM 6:00 A.M. TO 9:00 A.M. AND 3:00 P.M. TO 7:00 P.M. ON WEEKDAYS. HOURS AND DURATION WHEN TRAFFIC SIGNALS ARE DEACTIVATED AND/OR PLACED INTO FLASHING OPERATION REQUIRE THE PRIOR APPROVAL OF THE LADOT METRO RAIL ENGINEER. TRAFFIC SIGNAL DEACTIVATION AND/OR FLASHING OPERATION SHALL BE IMPLEMENTED BY A LADOT TRAFFIC SIGNAL ELECTRICIAN, IN COORDINATION WITH THE ATSCC CONTROL CENTER, AND SHALL BE REQUESTED THREE (3) WORKING DAYS IN ADVANCE THROUGH THE LADOT METRO RAIL ENGINEER, (213) 485-2610. FULL RESTORATION OF THE ATSCC SYSTEM MUST OCCUR WITHIN FIVE (5) WORKING DAYS AFTER DEACTIVATION.
4. THE CONTRACTOR SHALL COORDINATE WITH THE LADOT SIGNAL SHOP AT (213) 847-2944 TO ARRANGE CONTROLLER DELIVERY. THE CONTRACTOR SHALL PROVIDE AND DELIVER A COMPLETE FUNCTIONING CONTROLLER ASSEMBLY AND CABINET TO THE LADOT SIGNAL SHOP THIRTY (30) CALENDAR DAYS PRIOR TO THE INSTALLATION DATE, AND PICK UP THE CONTROLLER WITHIN FIFTEEN (15) CALENDAR DAYS AFTER NOTIFICATION BY LADOT SIGNAL SHOP.
5. ALL REMOVED TRAFFIC SIGNAL EQUIPMENT IDENTIFIED AS SALVAGED MATERIAL SHALL BE RETURNED TO LADOT. ARRANGEMENTS FOR RETURNING IDENTIFIED EQUIPMENT TO LADOT SHALL BE MADE FIVE (5) WORKING DAYS IN ADVANCE BY CONTACTING THE LADOT MATERIAL CONTROL DIVISION AT (213) 580-5477. THE CONTRACTOR SHALL OBTAIN A SALVAGE RECEIPT FROM LADOT AND FORWARD A SALVAGE RECEIPT TO THE CONTRACTOR AND THE LADOT MATERIAL CONTROL DIVISION. THE LADOT METRO RAIL ENGINEER AT 205 BROADWAY, SUITE 300, L.A. CA 90012. ALL OTHER REMOVED SIGNAL EQUIPMENT SHALL BE RETAINED BY THE CONTRACTOR.
6. ALL EXISTING TRAFFIC CONTROL SIGNING SHALL BE MAINTAINED WITH STANDARD SIGN BRACKETS BY THE CONTRACTOR. EXCEPT WHERE OTHERWISE INDICATED, EXISTING LARGE STREET NAME SIGNS ON MAST ARM, THE STANDARD SIGNS SHALL BE RELOCATED FROM THE VERTICAL TO THE MAST ARM PER LADOT STANDARD DRAWING NO. S-457.0. WHEN CALLED OUT ON THIS PLAN, CONTRACTOR SHALL FURNISH AND INSTALL LARGE STREET NAME SIGNS AND SIGN BRACKETS FOR INSTALLATION ON MAST ARM PER LADOT STD. DWG. NO. S-457.0. ANY TRAFFIC SIGNING DAMAGED OR LOST BY THE CONTRACTOR SHALL BE REPLACED AT THE CONTRACTOR'S EXPENSE.
7. THE CONTRACTOR SHALL FURNISH AND INSTALL, AS SHOWN ON THE PLANS, ALL TRAFFIC SIGNAL EQUIPMENT SUCH AS STANDARDS, MAST ARMS, SIGNAL HEADS, AND OTHER EQUIPMENT AS REQUIRED. ALL SUCH EQUIPMENT SHALL BE NEW. ALL SUCH EQUIPMENT SHALL BE IN ACCORDANCE WITH THE LATEST EDITION OF THE SIGNAL MANUAL. ALL VEHICLE HEAD EQUIPMENT SUPPLIED BY THE CONTRACTOR SHALL HAVE 1-1/2 INCH DIAMETER PIPE FIT MOUNTING HARDWARE, INCLUDING ALL TOP POST MOUNT HEADS, P HEAD MODULE REPLACEMENTS SHOWN ON THE PLAN SHALL REQUIRE A COMPLETE INSTALLATION, INCLUDING NEW PED HEAD AND TERMINAL COMPARTMENT. LEFT TURN SIGNAL HEADS ON MAST ARMS WITH TWO OR MORE SIGNAL HEADS SHALL BE TOP MOUNTED.

MTA – SAN FERNANDO VALLEY RAPID BUS SYSTEM (SIGNAL RESTORATION)

REVIEWED _____ 20 ____ _____ Transportation Engineer	RECOMMENDED _____ 20 ____ _____ Senior Transportation Engineer	ACCEPTED <u>April 8,</u> 20 <u>04</u> <u>Thomas L. Jones</u> Principal Transportation Engineer
CITY OF LOS ANGELES DEPARTMENT OF TRANSPORTATION WAYNE K. TANDA, GENERAL MANAGER		
AS BUILT Date of Installation: <u>11-18-05</u> LADOT Inspector: <u>Alegria</u> Condition As Of: <u>11-18-05</u> LADOT Engineer: <u>J. P.</u> District East Valley Thomas Guide 532-C7	TITLE OXNARD ST. & WOODMAN AVE.	
References Proj. No. 74720 (CCTV 011)	File Name <u>32220-P2.DWG</u>	Intersection No. <u>32220</u>
		Project No. <u>74720</u>
NOTICE: IF PLAN HAS NOT BEEN IMPLEMENTED WITHIN TWO (2) YEARS OF THE ACCEPTANCE DATE, IT MUST BE RESUBMITTED TO LADOT SIGNAL DESIGN SECTION FOR REVIEW AND APPROVAL.		

NORTH HOLLYWOOD TO WARNER CENTER GROUP 3 INTERSECTIONS RESTORATION TRAFFIC SIGNAL OXNARD ST. & WOODMAN AVE.	SEGMENT NO	
	C-0675	
	DRAWING NO	REV
	G3TS-006	1
	SCALE	
	1" = 20'	
	SHEET NO	

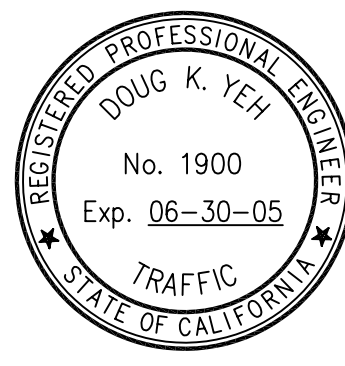

1	02-10-06	JFB						AS-BUILT RECORD DRAWING
0	04-08-04	GXF	WJO	52655	12/31/06	WALTER J. OKITSU		ISSUED FOR CONSTRUCTION
REV	DATE	BY	APP	REG NO	EXPRES	SEAL HOLDER		DESCRIPTION

DESIGNED BY	G. FIGUERO
DRAWN BY	J. BERNAL
CHECKED BY	D. YEH
IN CHARGE	W. OKITSU
DATE	04/08/04



WASHINGTON

LOS ANGELES COUNTY METROPOLITAN TRANSPORTATION AUTHORITY
SAN FERNANDO VALLEY EAST-WEST BRT PROJECT



Katz, Okitsu & Associates
Traffic Engineers & Transportation Planners
1055 Corporate Center Drive, Suite 300
Monterey Park, California 91754-7642
Tel: (323) 260-4703 Fax: (323) 260-4705

NORTH HOLLYWOOD TO WARNER CENTER
GROUP 3 INTERSECTIONS
RESTORATION TRAFFIC SIGNAL
OXNARD ST. &
WOODMAN AVE.