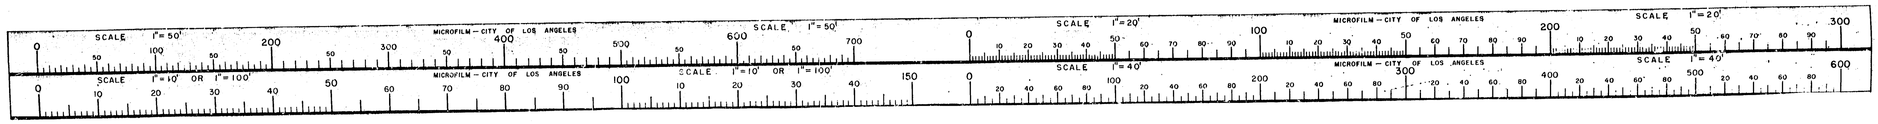

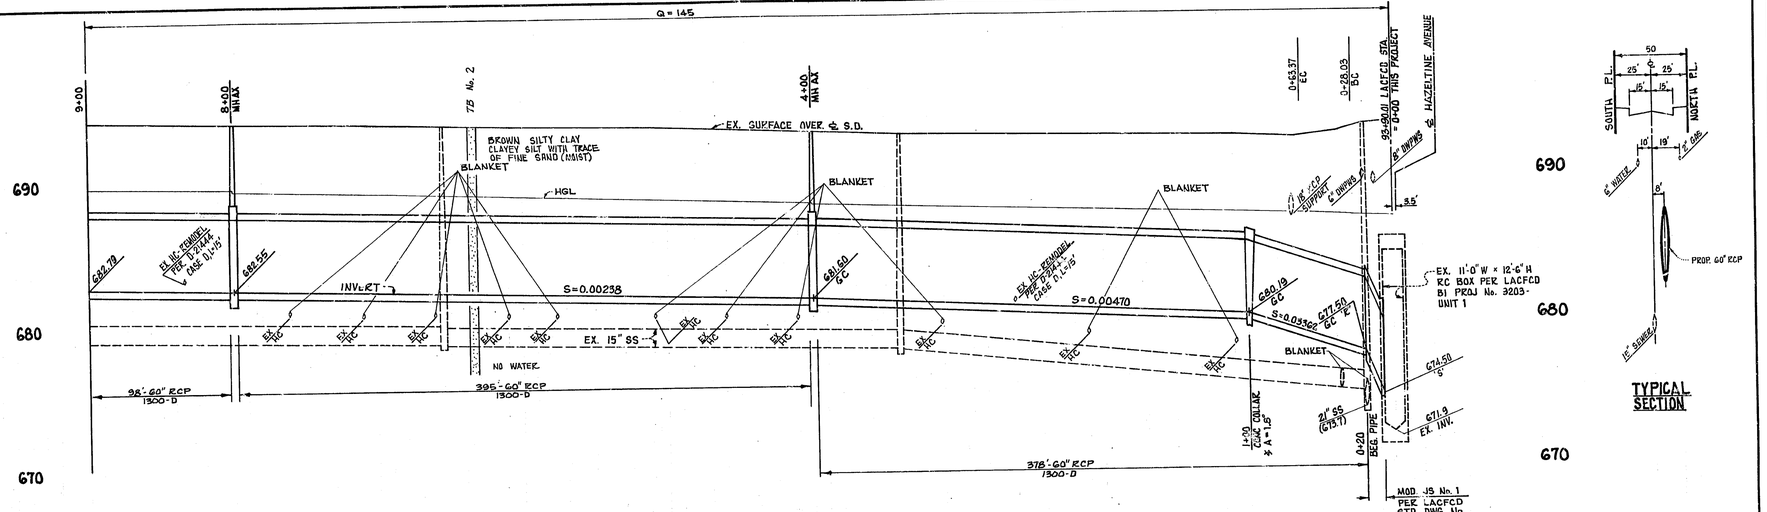

	DATE
DESIGNED JIM LAKEWOOD	AUG 1976
DRAWN JIM LAKEWOOD	AUG 1976
CHECKED I. CARSON	DEC 1976
SUPERVISED S. ROSENBERG	JAN 1977
PROJ. ENGR. R.M. SILLEN	JAN 1977

9 8 7 6 5 4 3 2 1 0

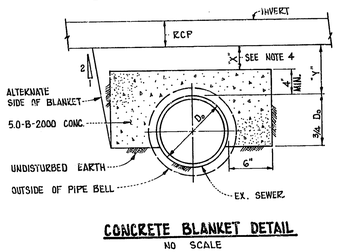

CONCRETE BLANKET DETAIL
NO SCALE

NOTES FOR CONCRETE BLANKET

1....BLANKET SHALL BE INSTALLED OVER EXISTING SEWERS WITH DIAMETERS FROM 6-INCH TO 24-INCH WHEN "Y" IS LESS THAN 18 INCHES.

2....THE BLANKETING SHALL EXTEND ACROSS THE FULL WIDTH OF TRENCH EXCAVATION.

3....BLANKET SHALL BE PLACED AT LEAST 48 HOURS BEFORE RCP PIPE IS PLACED.

4....WHERE PIPE CROSSES OVER AN EXISTING SEWER, "X" EQUAL TO A MINIMUM OF 1/12 O.D. OF THE CROSSING PIPE SHALL BE PROVIDED FOR BEDDING MATERIAL WHERE POSSIBLE. OTHERWISE THE ENTIRE TOP SURFACE OF THE CONCRETE BLANKET SHALL BE RAISED TO MAKE CONTACT WITH THE LOWER 90° OF THE PERIMETER OF THE CROSSING PIPE.

0+00 MODIFIED JS No. 1
A = 44°-53'-30" , B=60° , C=12'-5
ELEV S = 674.50

NOTES:
1....BREAKOUT LIMITS SHALL BE DETERMINED AS FOLLOWS:
UPSTREAM LIMIT - AT THE INTERSECTION OF THE OUTSIDE OF THE SPUR WALL WITH THE OUTSIDE WALL FACE OF THE EXISTING R.C. BOX.
DOWNSTREAM LIMIT - 6 INCHES DOWNSTREAM OF THE INTERSECTION OF THE SPUR WALL WITH OUTSIDE WALL FACE OF THE EXISTING R.C. BOX.
TOP AND BOTTOM LIMITS - SEE UPSTREAM LIMIT DESCRIPTION. THE OPENING SHALL BE RECTANGULAR, CUT NORMAL TO THE WALL SURFACE AND WITHOUT DAMAGING REINFORCING STEEL.

2....THE EXISTING R.C. BOX REINFORCEMENT SHALL BE CLEANED, CUT AT CENTER OF OPENING AND BENT INTO THE SPUR.

REFERENCES:
LACEFB: 40218-512

SUBSTRUCTURE MAP: 133
WYE MAP: 901 C
SEWER PLAN: DL-850
STREET PLANS: P-2369
P-25632

JS No. 1 NOTES CONTINUED

3....1-INCH DEEP SAWCUT SHALL BE MADE AT BREAKOUT LIMIT (EXTERIOR SURFACE ONLY) TO ASSURE CLEAN CUT.

4....PRIOR TO REMOVING ANY PORTION OF THE BOX, REMOVE EARTH LOADS ON TOP OF THE EXISTING R.C. BOX WITHIN THE RECTANGULAR AREA BETWEEN THE BREAKOUT LIMITS AND THE CENTERLINE OF THE BOX AND THE WALL.

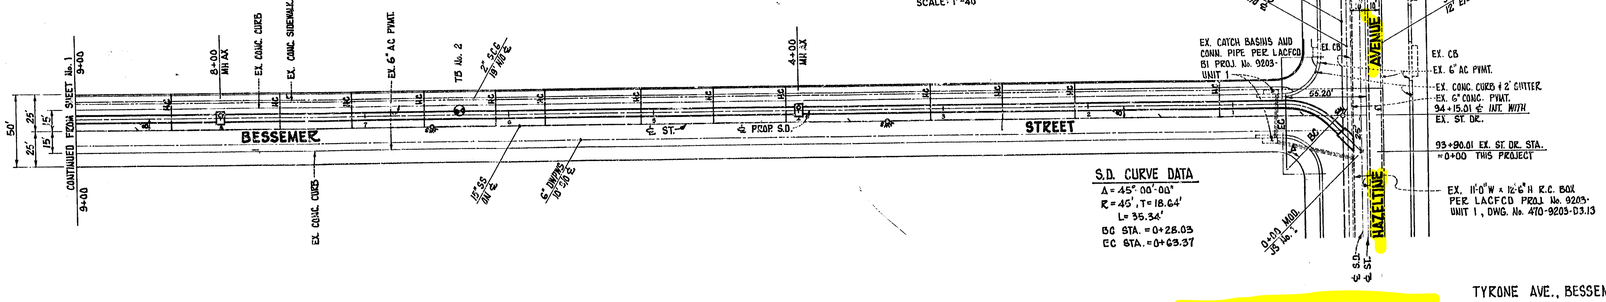

S.D. CURVE DATA
Δ = 45° 00' 00"
R = 40', T = 18.64'
L = 35.34'
BC STA. = 0+28.03
EC STA. = 0+63.37

TYRONE AVE., BESSEMER. ST TO AETNA ST. W.O. 6K40

SCALES	HORIZ. 1"=40'
	VERT. 1"=4'

SHEET 2 OF 2

INDEX NUMBER D-25620

SYM.	REVISION DESCRIPTION	DIV. ENGINEER	DATE

CITY OF LOS ANGELES
DONALD C. TILLMAN
CITY ENGINEER

DATE Jan 17 1977
DIVISION ENGINEER

D-25620

D-25620

CERTIFICATE
I hereby certify that this is a true and accurate copy of the official city record described there, made in accordance with Section 438 of the Charter of the City of Los Angeles, and Section 34090.5 of the Government Code.
Date 3-4-77
REX E. LAYTON, City Clerk
By

ENG. 6.300 (R 2-72)